


LED DOUBLE OBSTRUCTION LIGHT

OL2B-LED12-48Vdc-2

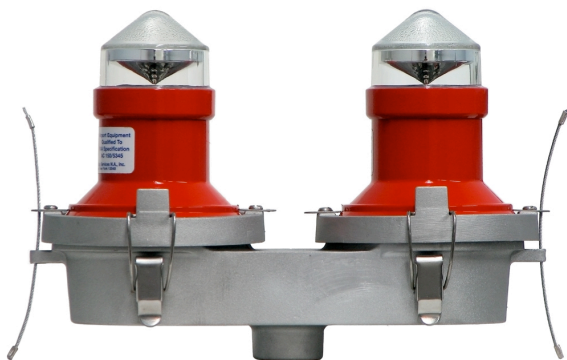

FEATURES

- Highly resistant glass construction
- Reduced energy consumption by 96% versus incandescent
- 10 years durability
- Very stable light output under voltage variations

SPECIFICATIONS

Light output

Lamp type	LED
Effective candelas	32.5 min.
Horizontal coverage	360°
Vertical beam	>10°
Expected min. lamp life	10 years

Electrical value

Power consumption	6.8 Watts
Current	140 mA to 750 mA
Power requirements	12 to 48 Vdc

Mechanical

Weight	3 Kg (7 lbs)
Dimensions (W x H x D)	350mm x 300mm x 120mm (13¾" x 12" x 4¾")
Hub sizes	¾" or 1" NPT
Lenses material	Pyrex glass
Base material	Aluminum

Others

FAA type	L-810
Transport Canada type	CL-810
Operating temperature	-55°C to 55°C (-67°F to 131°F)
Warranty	5 years

COMPLIANT WITH :

• **FAA** AC 150/5345-43G

•  Transports Canada / Transport Canada Standard 621